




RF-LAMBDA INC.

RF-LAMBDA INC.

Customer Total Satisfaction

Toll Free: 1-(866) 592-6858
Email: sales@rflambda.com
Website: www.rflambda.com

RFLC-HXD-17 High Power 250W Circulator

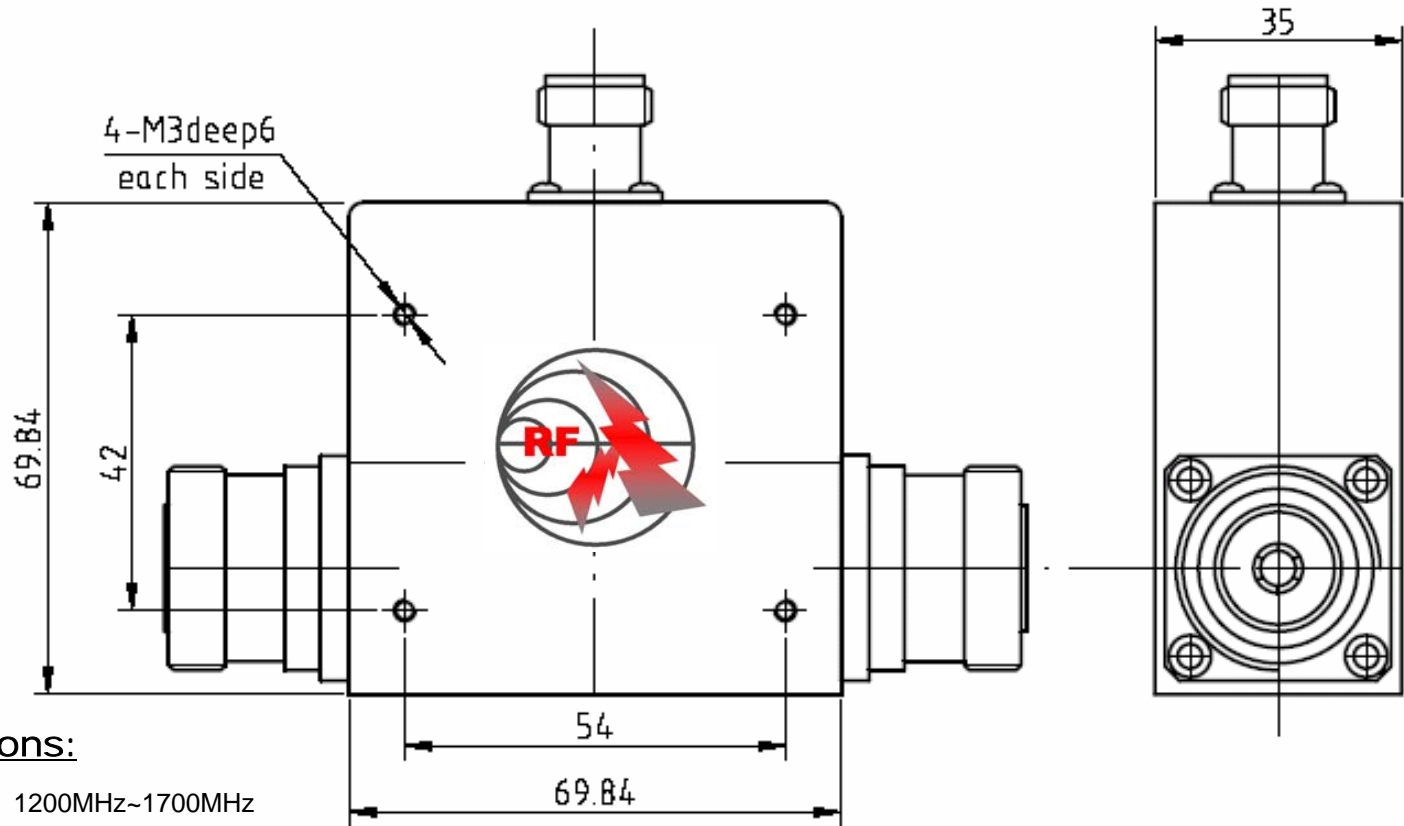

Electrical Specifications:

Center Frequency Range:	1200MHz~1700MHz
Bandwidth:	100MHz
Insertion Loss:	0.3dB
Isolation:	20dB
Return Loss:	25dB
Power Handle:	250W average 2000W Peak
Operation Temp. Range:	-30°C~+70°C
Storage Temp Range:	-40°C~+85°C
Connector:	7/16 - Male (Input & Output Port) N-Female (ISO port)

Title: RF-LAMBDA INC. RFLC-HXD-17 High Power Circulator	Label	Cir	Sheet	1
	Date	Oct 11th 2005	Sheets	1
	Designer		Stream	05
	Auditor	A0DR	Version	02
	Consultant		PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA CORPORATION	
	Approved By	RFP Dept.		
Unit	mm			