
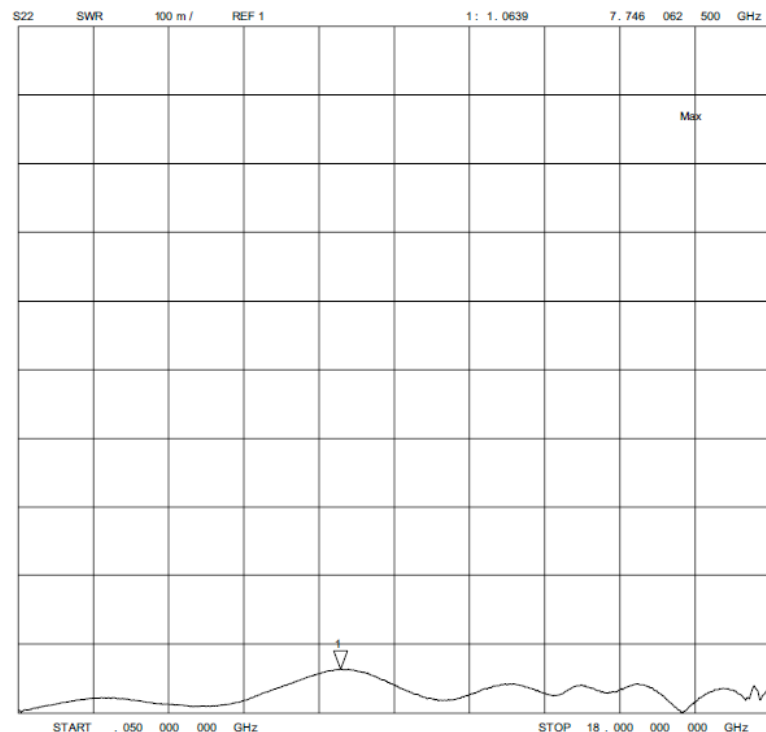


Coaxial Adapter N Male to N Female

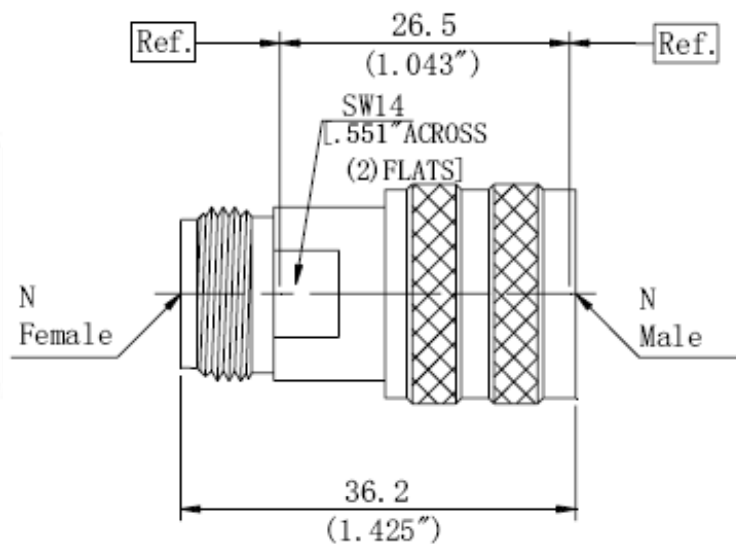

2.0 Environment specifications	
2.1	Opt. Temp. -55°C~+165°C
2.2	Storage Temp. -60°C~+185°C
2.3	Altitude 45000 ft
2.4	Vibration 10g rms (15 degree 2KHz)
2.5	Humidity 100% RH at 35c, 95%RH at 40 °c
2.6	Shock 20G for 11msc

1.0 Mechanical Specifications	
1.1	N MIL-STD-348A
1.2	N MIL-STD-348A
1.3	MIL MIL-G-45204

PN	Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insulate material	Material	Center PIN
RFCAQPNMNF	DC-18	50	1.15	PEI or PEI&PTFE	Stainless Steel SU303	Brass with Gold plating

PAGE 1 OF 1

DATE JAN 8th 2003

DESIGN RFPC

RF-LAMBDA RFPC

CAD MODEL REVISION 02-1

ASSEMBLY REVISION VS23


ASSEMBLY NAME RFLVR54

DRAWING NUMBER D02-12

www.rflambda.com

RF-LAMBDA

SIZE LT SHEETS 1 OF 1


COAXIAL ADAPTER RFCAQPNMNF

PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY