
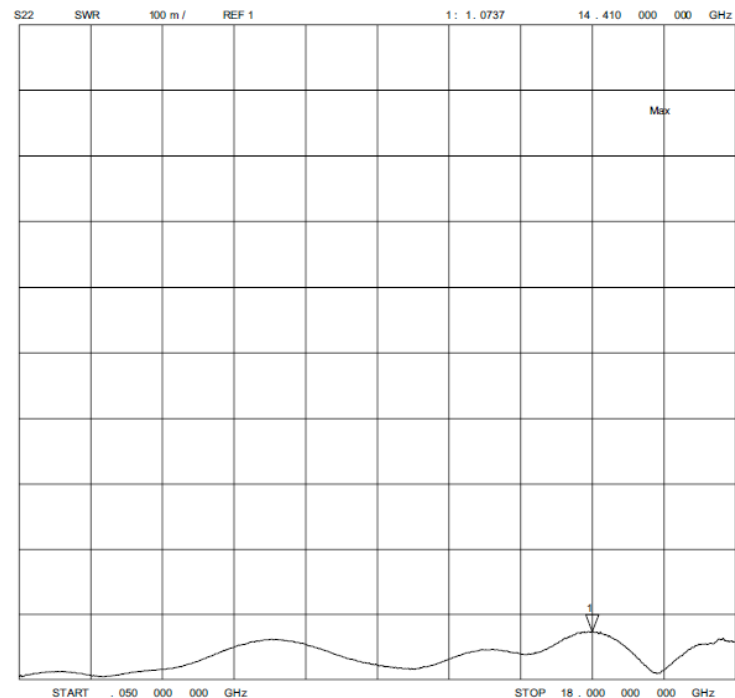


# Coaxial Adapter N Female to N Female

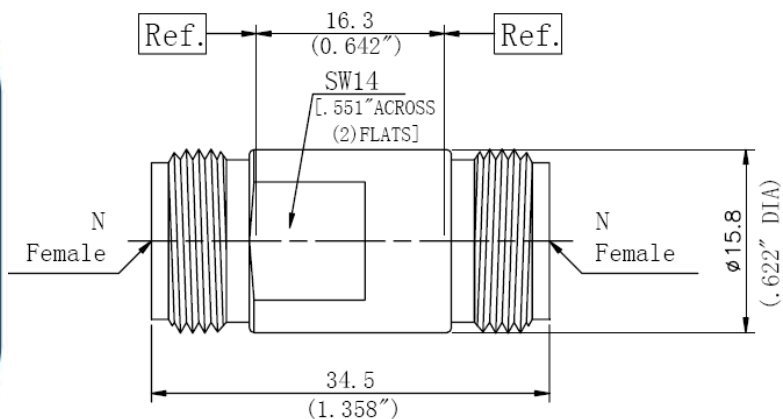

2.0 Environment specifications	
2.1	Opt. Temp. -55°C~+165°C
2.2	Storage Temp. -60°C~+185°C
2.3	Altitude 45000 ft
2.4	Vibration 10g rms (15 degree 2KHz)
2.5	Humidity 100% RH at 35c, 95%RH at 40 °c
2.6	Shock 20G for 11msc

1.0 Mechanical Specifications	
1.1	N MIL-STD-348A
1.2	N MIL-STD-348A
1.3	MIL MIL-G-45204

PN	Frequency (GHz)	Impedance ( $\Omega$ )	VSWR (max)	Insulate material	Material	Center PIN
RFCARANFNF	DC-18	50	1.15	PEI	Stainless Steel SU303	Brass with Gold plating

PAGE 1 OF 1

DATE JAN 8<sup>th</sup> 2003

DESIGN RFPC

RF-LAMBDA RFPC

CAD MODEL REVISION 02-1

ASSEMBLY REVISION VS23

ASSEMBLY NAME RFLVR54

DRAWING NUMBER D02-12

www.rflambda.com

**RF-LAMBDA**

SIZE LT SHEETS 1 OF 1

**COAXIAL ADAPTER RFCARANFNF**