



### Narrow Band Low Noise Amplifier 1.7GHz~2.5GHz

- High Gain 37dB
- Applicable for base station, repeaters of cellular network
- LMDS multi-carrier operation
- High Peak to average handle capability
- High Linearity and low noise figure
- Lower Noise Figure unit available upon request




Electrical Specifications			
Frequency Range:	1700MHz-2500MHz	P1dB	+23dBm
Noise Figure:	1.4dB typ. 2.0dB Max *	Out IP3:	+33dBm
Gain:	37dB	Output VSWR:	1.5 : 1
Flatness:	+/-0.8dB	Input VSWR:	1.5 : 1
Input Power	-14dBm (Max) **	DC Voltage:	+12V/270mA max ***
Mechanical and Environmental Specifications			
Operation Temperature:	-40°C to 85°C base plate	Mechanical shock	30G, 11mSec half sin wave, 3 axis both directions
Vibration:	14.2g RMS (15-2000Hz) functional	Humidity	95% relative humidity, 65°C 96Hour
	16.2g RMS (15-2000Hz) endurance, 1 hour per axis	MTBF	50000 hour min
Connectors:	RF SMA-F Removable	Case:	Conductive no paint
	Supply RFI filter solder Pin	Dimension Size (L x W x H):	3.27" x 1.38" x 0.65" 83mm x 35mm x 16.5mm

\*Contact manufacture for lower NF solution

\*\* Input over drive protection available upon request

\*\*\* DC Reverse protection available upon request

Heat Sink required during operation.

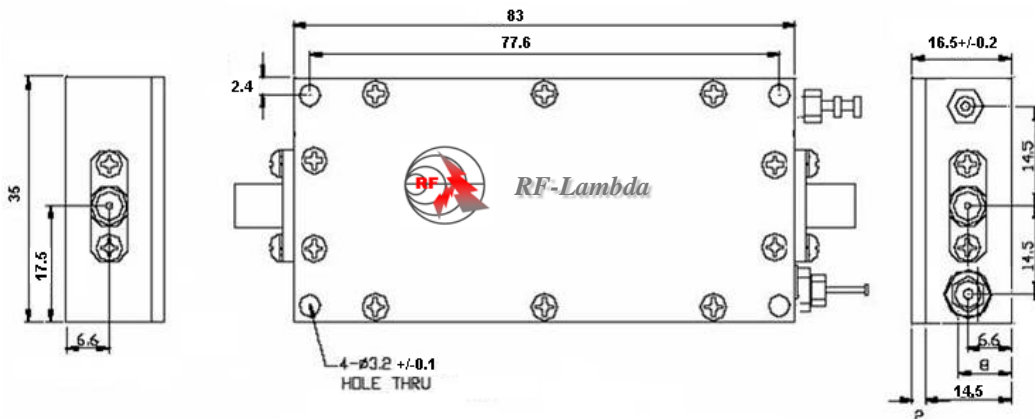

Narrow Band Low Noise Amplifier 1.7GHz~2.5GHz