



Reflective 2-4.0GHz Coaxial SP8T Switch



Features

- Wide Band Operation 2.0-4.0GHz
- High Power Handle Capability up to 5-100W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request

Specification	Reflective type			
	PN: RFSP8TR0204G			
	Low	Med	High	
Frequency Range(GHz)	2	3	4	
Insertion Loss(dB)	1.2dB typ. @2GHz	1.5dB typ. @3GHz	2.0dB typ. @4GHz	
VSWR	1.3	1.3	1.5	
Isolation(dB)	85	85	80	
Switching Speed(ns)	50	100	150	
PrdB Power (dBm)		27		
Absolutely max. Power (W)				5-100W (Upon request)
Weight (g)	65			
IIP3 (Input IP3) dBm	40			
Impedance(Ohms)	50Ω			
Power Supply (V)	+/-5 V DC			
Current(mA)	240mA (+5V) 100mA (-5V)			
Input Connector	SMA-Female			
Output Connector	SMA-Female			
Finishing	Gold Plating			
Material	Brass			
Seal	Hermetically Sealed			
Control (TTL Driver Included)	TTL Control			
	C3	C2	C1	Status
	0	0	0	Jo-J1
	0	0	1	Jo-J2
	0	1	0	Jo-J3
	0	1	1	Jo-J4
	1	0	0	Jo-J5
	1	0	1	Jo-J6
	1	1	0	Jo-J7
	1	1	1	Jo-J8

Reflective Coaxial Single Pole Eight Throw Switch 2-4.0GHz



RF-LAMBDA

The power beyond expectations

RFSP8TR0204G

Reflective Coaxial Single Pole Throw Switch 2-4.0GHz

Absolute Maximum Ratings	
Biassing	+/-5 V
TTL Control Voltage	+5V/0V
Input RF power	20dBm
Storage Temperature (C°)	-50 ~ +125


Biassing Up Procedure	
Step 1	-5V
Step 2	+5V
Step 3	TTL
Power OFF Procedure	
Step 1	+5V
Step 2	-5V
Step 3	TTL

Environment specifications	
Operational Temperature (C°)	-45 ~ +85
Storage Temperature (C°)	-50 ~ +125
Altitude	30,000 ft (Controlled environment)
Vibration	65g rms (15 degree 2KHz)
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msc

Ordering Information		
Part No	ECCN	Description
RFSP8TR0204G	EAR99	SP8T 2-4GHz PIN Diode Switch



Median Lifetime (Tm) vs. Channel Temperature (Tch)

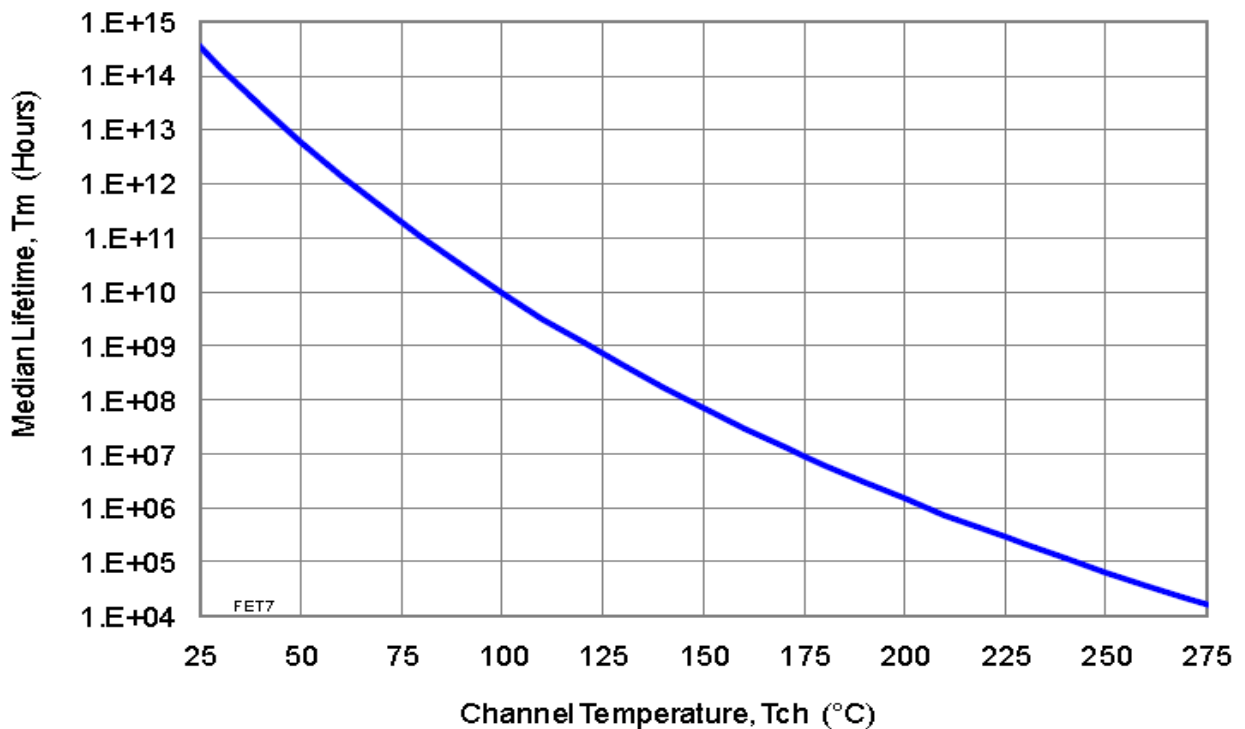









RF-LAMBDA

The power beyond expectations


RFSP8TR0204G

Reflective Coaxial Single Pole Eight Throw Switch 2-4.0GHz

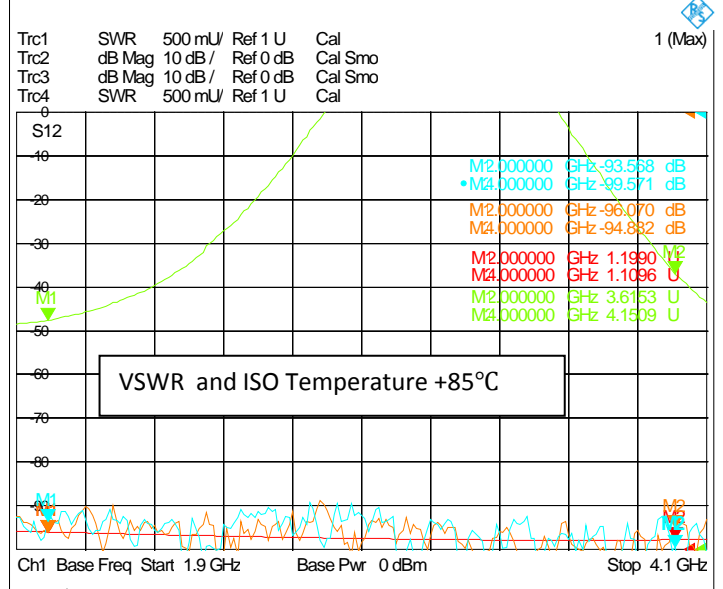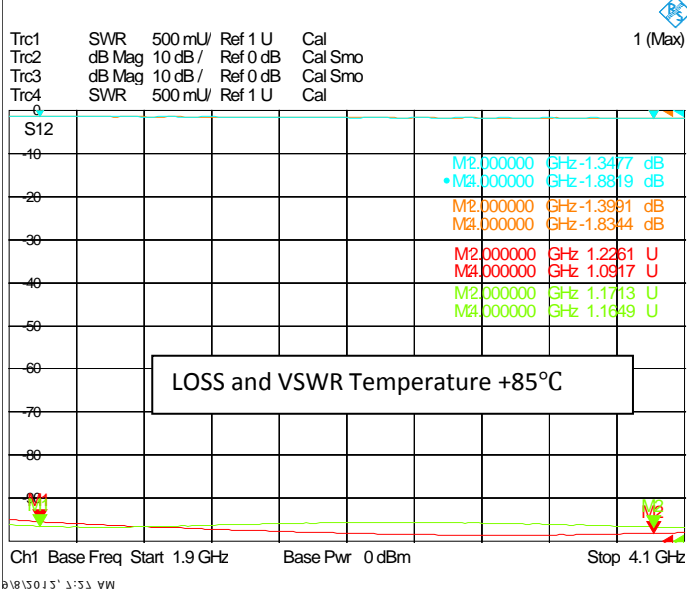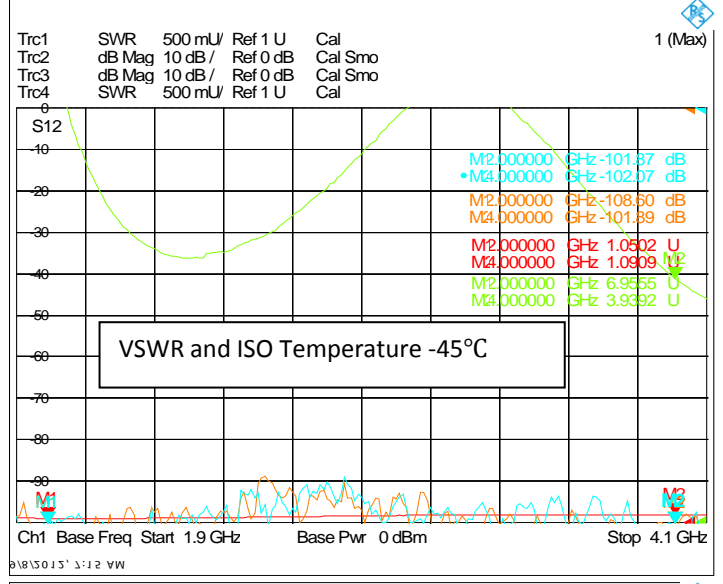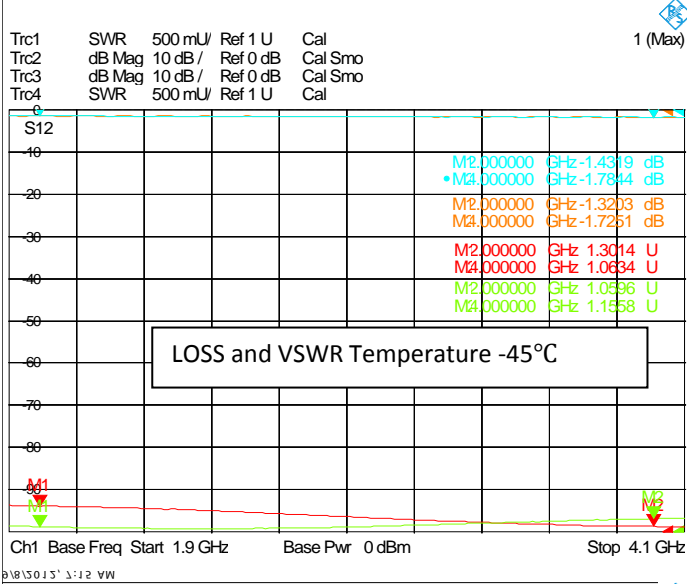
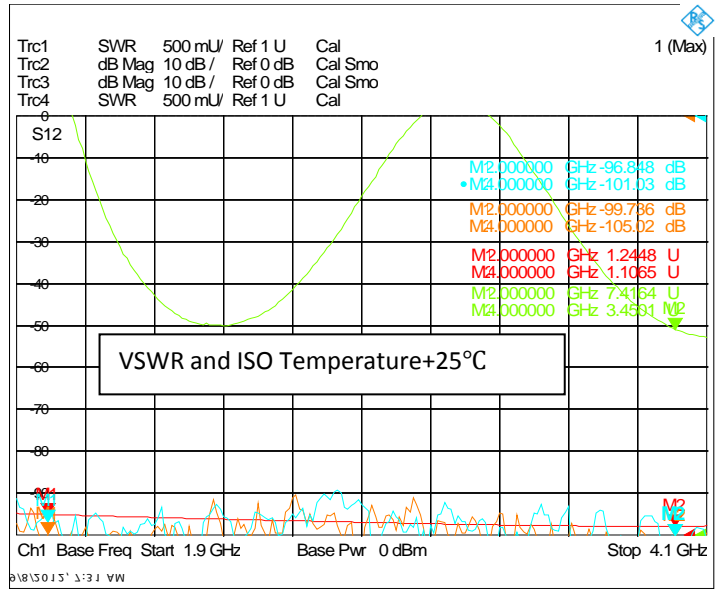
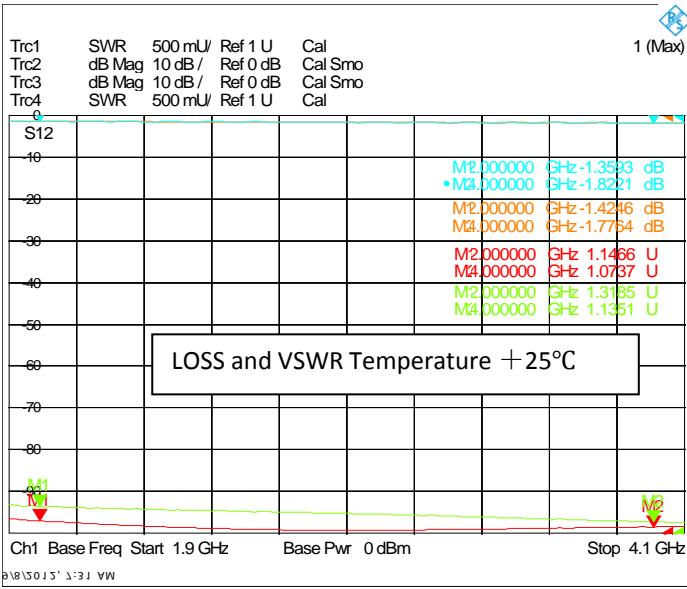




1dB Compression Point

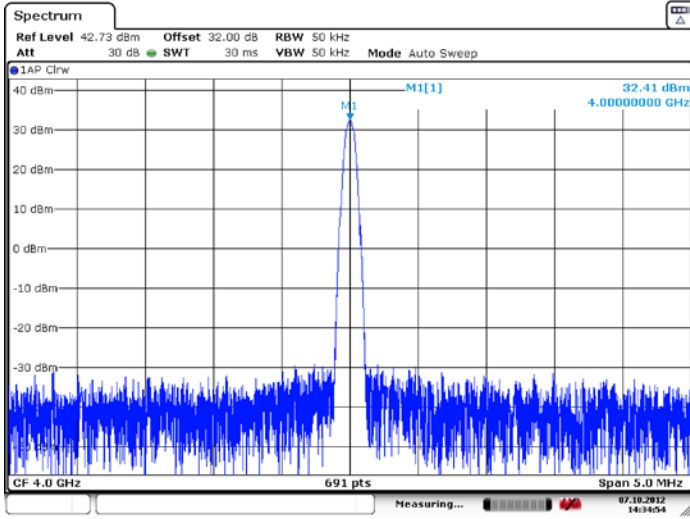

IP3 – INPUT IP3 Point

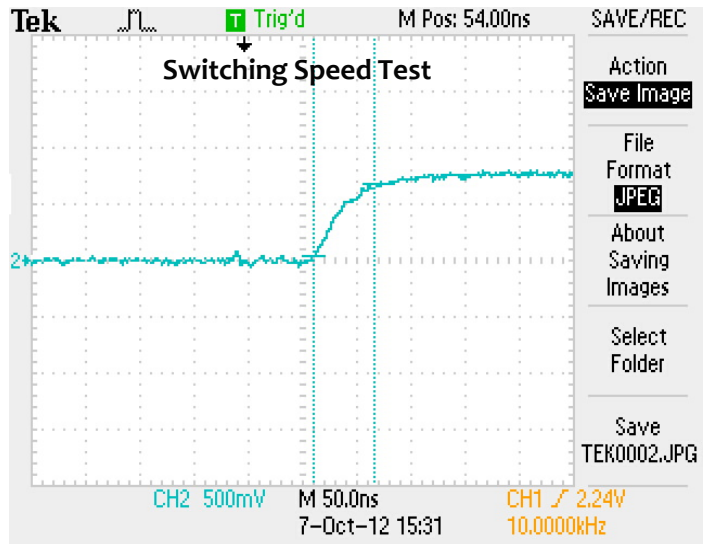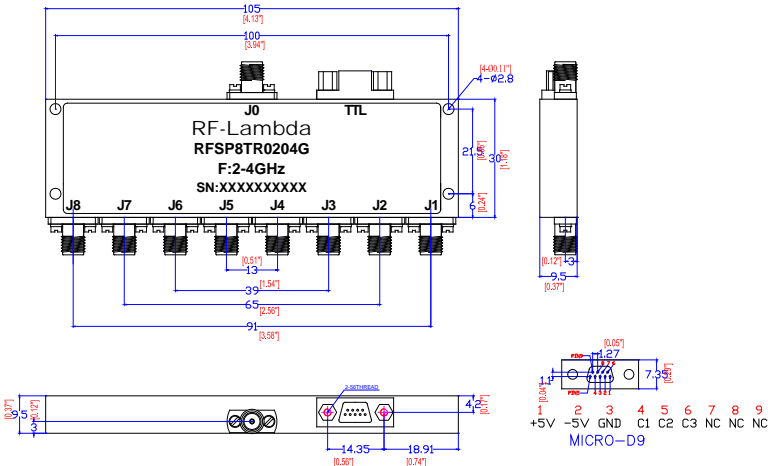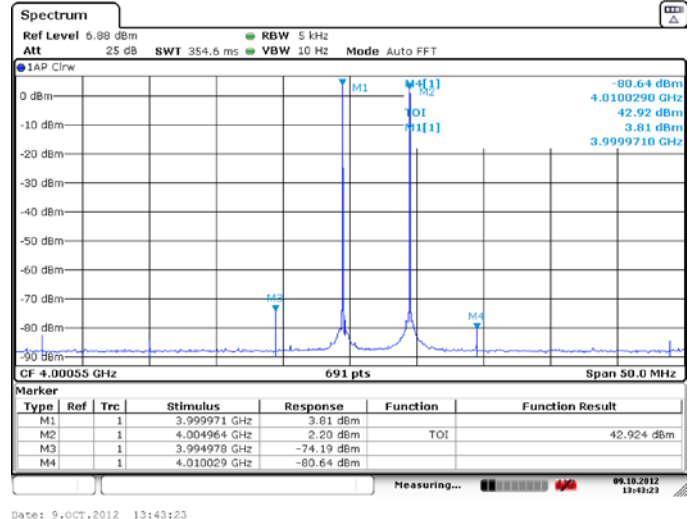

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.