

## Dual-Polarization Horn Antenna 12.4 - 18GHz



Note: Photo is for illustration purposes only.  
Please refer to the outline drawing.

### Features

- Dual Polarization Horn Antenna
- Compact Size
- Coaxial Interface

### Typical Applications

- Wireless Infrastructure
- Military & Aerospace
- Test and Measurement

### Electrical Specifications, $T_A=25\text{ }^\circ\text{C}$


Parameter	Min.	Typ.	Max.	Units
Frequency Range	12.4-18			GHz
Gain (Avg.)	20			dB
VSWR			1.7	: 1
Polarization Isolation	20			dB
Polarization	Dual Linear Polarization			
Impedance	50			$\Omega$
Connector Type	N-Female			
Material	Aluminum			
Finish	Inside	Chromate Conversion		
	Outside	Anticorrosion Grey Paint		

**Environmental Specifications and Test Standards**

Parameter	Description
Operational Temperature	-55°C~+85°C (Case Temperature)
Storage Temperature	-55°C~+105°C
Thermal Shock	-55°C → +85°C (5 Cycles / 10 hours)
Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

**Outline Drawing:**

All Dimensions in mm [inches]

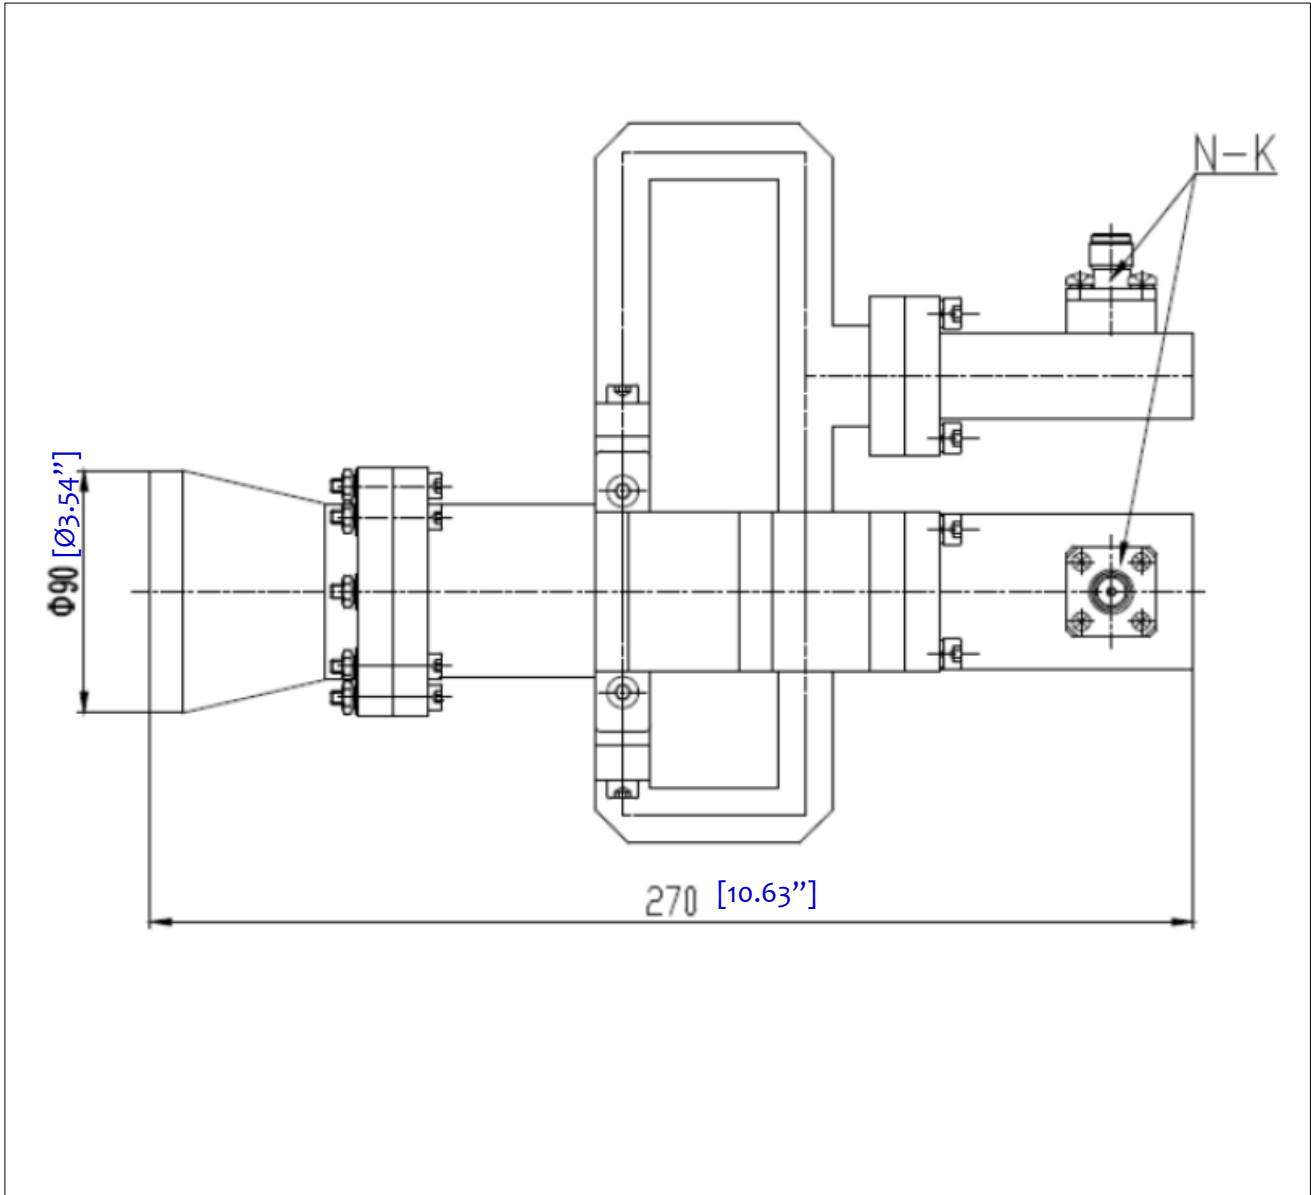

**Dual-Polarization Horn Antenna 12.4 - 18GHz**

**Important Notice**

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.