

WRD750 Double Ridge Waveguide Circulator 11.5GHz–18GHz



Note: Photo is for illustration purposes only.
Please refer to the outline drawing

Product Description

RFWC750GA-11.5G18G is a waveguide circulator with a frequency range of 11.5 to 18GHz.

The circulator has a typical isolation of 16dB. The maximum insertion loss is 0.5dB.

The circulator's interface is WRD750.

Features

- High power handling up to 200W
- Wide band operation
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature
- All specifications can be modified upon request

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications ($T_A=+25^\circ\text{C}$)


Parameter	Min.	Typ.	Max.	Units
Frequency Range		11.5 - 18		GHz
Insertion Loss		0.45	0.5	dB
Isolation	15	16		dB
VSWR		1.40	1.43	:1
Forward Power		200		W
Weight		-		lbs.
Rotation		Clockwise		
Interface		WRD750		
Flange Type		WRD750-C1		

Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-20°C to +50°C (Case Temperature)
Storage Temperature	-40°C to +70°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
*Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


*For vibration testing details please see additional information section.

Typical Performance Plots

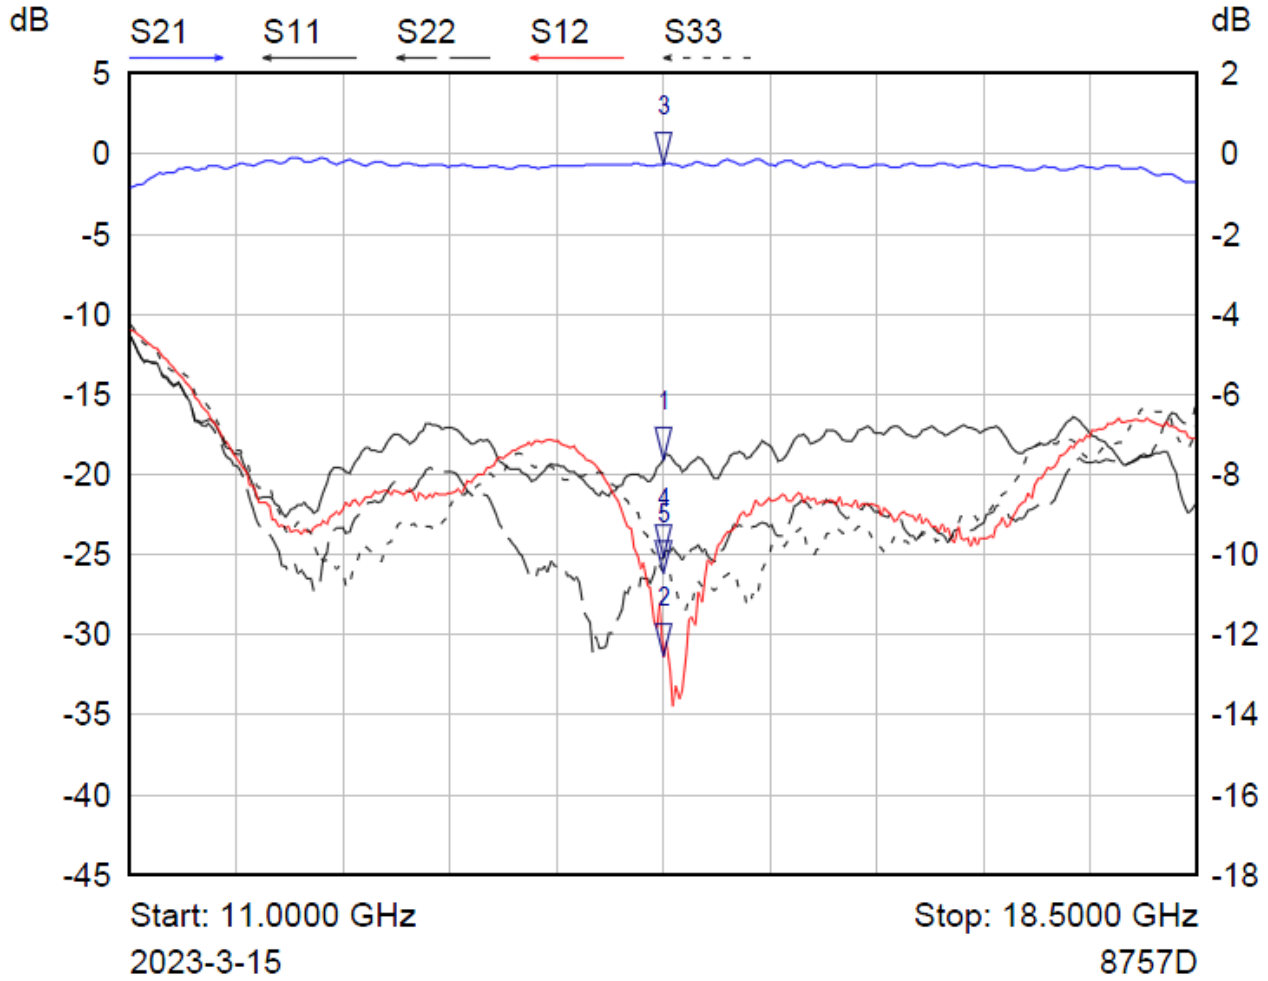

Mkr	Trace	X-Axis	Value	Notes
1 ▾	S11	14.7500 GHz	-19.06 dB	
2 ▾	S12	14.7500 GHz	-31.29 dB	
3 ▾	S21	14.7500 GHz	-0.25 dB	
4 ▾	S22	14.7500 GHz	-25.18 dB	
5 ▾	S33	14.7500 GHz	-26.14 dB	

Outline Drawing

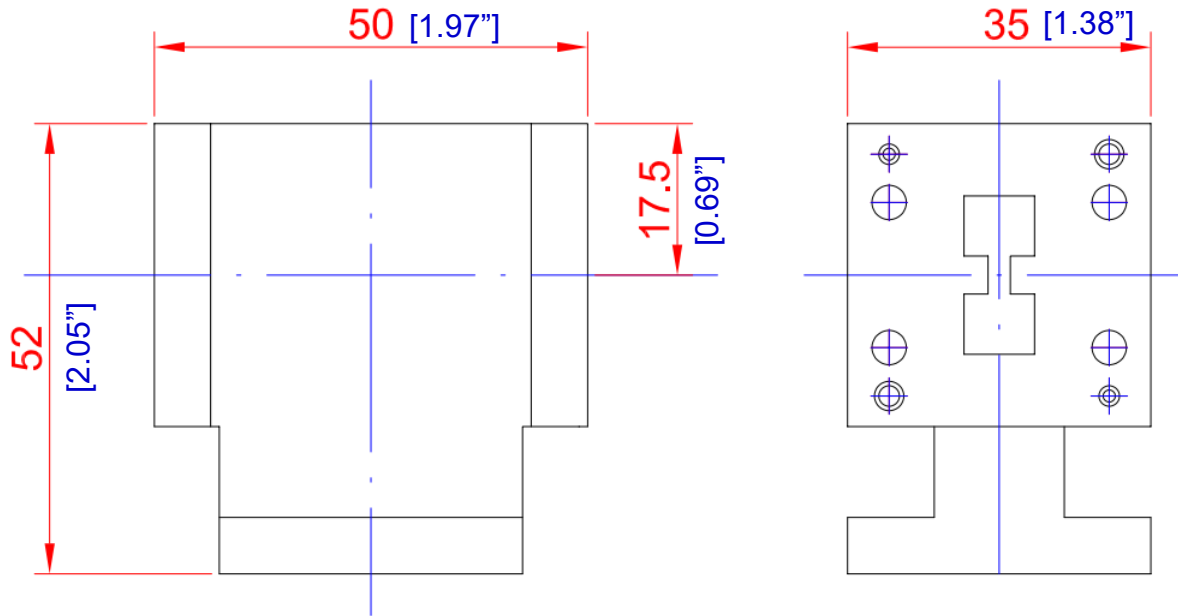

Notes:

1. Package Material: Aluminum Alloy
2. Plating: Conductive Oxide
3. All dimensions are in millimeters [inches].
4. Outline Tolerances ± 0.5 [0.02], Mounting Holes Tolerances ± 0.2 (0.008) unless otherwise specified.

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFWC750GA-11.5G18G	WRD750	11.5GHz-18GHz Waveguide Circulator

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.