



800W CW WAVEGUIDE WR284 ISOLATOR --- RFWI284A


2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	15000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	90% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR284
1.2	Flange type	CPRF flat
1.3	Flange Holes	Through or tapped holes
1.4	Basis-material	Aluminum
1.5	External Body Finish	NO PAINT OR BLUE PAINT

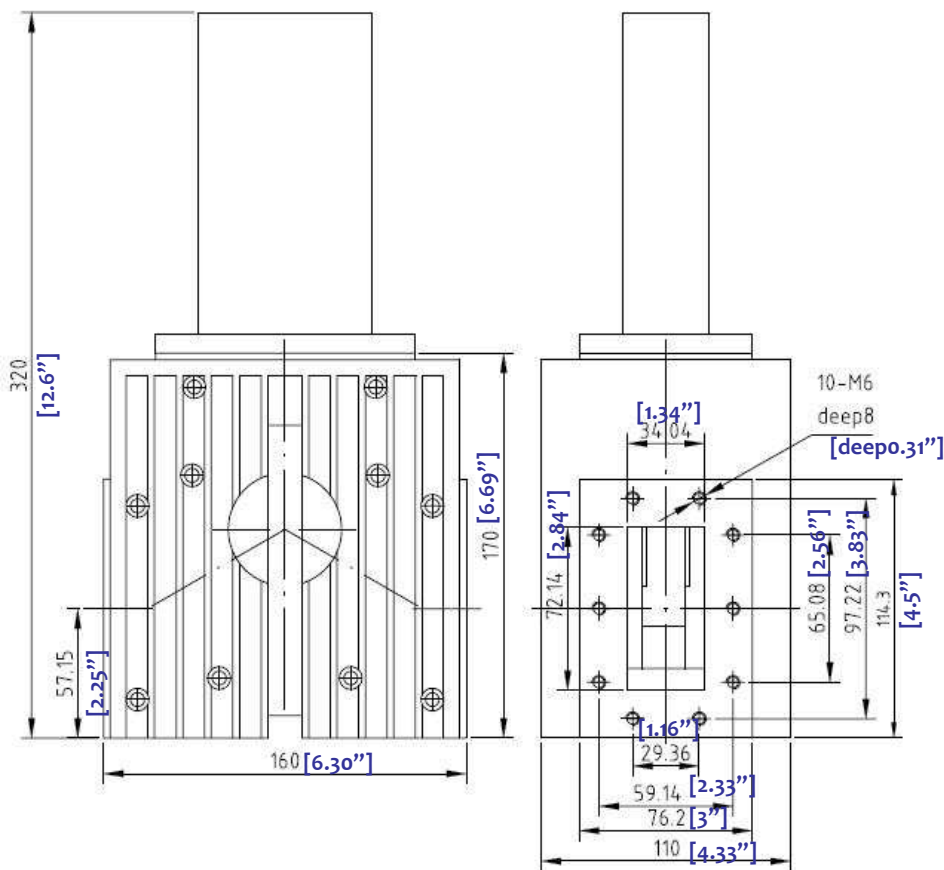

3.0	Electrical Specifications	
3.1	Center Freq. Range	2.60-3.95GHz
3.2	Bandwidth	140MHz (2.77GHz-2.93GHz as shown)
3.3	Insert Loss	0.8dB
3.4	Isolation	20dB
3.5	VSWR	1.20 : 1
3.6	Forward power	800W
3.7	Reverse power	100W

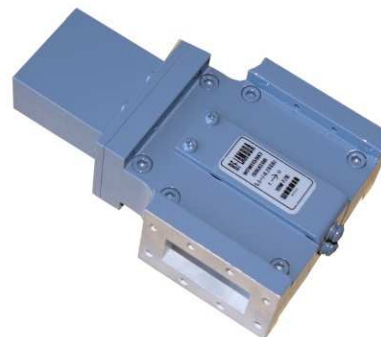

PAGE 1 OF 1	DATE Jun 17 th 2009
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY	DESIGN RFPFC
 RFWI284A WAVEGUIDE HIGH POWER CIRCULATOR	RF-LAMBDA RFPFC
www.rflambda.com	CAD MODEL REVISION 02
RF-LAMBDA	ASSEMBLY REVISION VS2
SIZE LT	ASSEMBLY NAME RFLVR42
SHEETS 1 OF 1	DRAWING NUMBER D02-3