

## WAVEGUIDE WR42 10W TERMINATION – RFWT42A



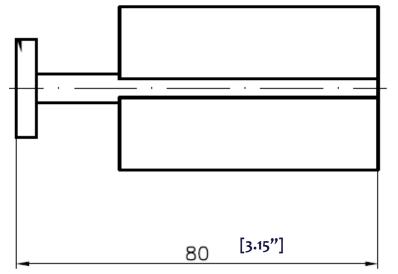

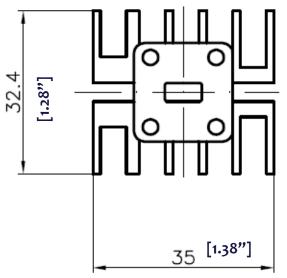

3.0	Electrical Specifications		
3.1	Frequency	18-26.5GHz	
3.2	Power	10W (CW)	
3.3	Peak Power	1KW (1us pulse)	
3.4	VSWR	1.20:1 (type.)	

1.0	Mechanical Specifications			
1.1	Waveguide type	Rectangular Waveguide WR42		
1.2	Flange type	CPRG, CPRF, COVER, CHOKE available		
1.3	Flange Holes	Through		
1.4	Basis-material	Alloyed Cuprum 0.1kg		
1.5	Internal Finish	Silver Plated chromate or conversion		
1.6	External Finish	Body painted with gray/black epoxy enamel		

2.0	Environment specifications		
2.1	Operation Temp.	-40°C~+85°C	
2.2	Storage Temp.	-60°C~+125°C	
2.3	Altitude	45000 ft	
2.4	Vibration	10g rms (15 degree 2KHz)	
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c	
2.6	Shock	20G for 11msc	
2.6	Shock	20G for 11msc	

PAGE 1 OF	DATE Sep 20th 2005		2			
PROPRIETARY INFOR	DESIGN		-			
THE INFORMATION CONTAINED IN THIS PROPERTY OF RF-LAMBDA EXCEPT AS AUTHORIZED IN WRUTUBG BT RF-LAMB THIS DOLICI IMFNT-SHALL KEEP ALL INF	RFPC					
HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE			RF-LAMBDA	١.		
WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR			RFPC			
OPERATING AND MAINTENANCE PURP			1			
					CAD MODE	REVISION
RFWT421	11		1			
111 221 122	ASSEMBLY V.S	REVISION SDS				
WAVEG	ASSEMBLY		_			
TERMIN	RFLVR05					
	DRAWING NUMBER					
			DRAWING NUMBER		0	
www.rflambda.com			D0	5-1		
RF-LAMBDA	SIZE	SHEETS	OF			
III LAMBOA	LT	1	OF	1	l	