



RF-LAMBDA

The power beyond expectations


RFHPA430M225W

225W High Power TV Broadcasting Amplifier

- Applicable TV broadcasting
- Aerospace and military applications
- High Peak to average handle capability
- High Linearity and low noise figure
- All specifications can be modified upon request



Electrical Specifications			
Frequency Range:	433MHz \pm 20MHz	P1dB	225W CW
IMD	<-48dBc (Pout=600W)	Type	Class AB
Gain:	44dB	Output VSWR:	1.5 : 1
Flatness:	+/-0.3dB	Input VSWR:	1.5 : 1
Input Power	+15dBm (Max)	DC Voltage:	28VDC~32V DC / 20A
Mechanical and Environmental Specifications			
Operation Temperature:	0°C to 40°C	Mechanical shock	30G, 11mSec half sin wave, 3 axis both directions
Vibration:	14.2g RMS (15-2000Hz) functional	Humidity	95% relative humidity, 65°C 96 Hour
	16.2g RMS (15-2000Hz) endurance, 1 hour per axis	MTBF	9,000 hour min
Connectors:	L16 or N	Case:	Metal case grey paint
	110V AC or 220V AC	Dimension Size (L x W x H):	13.62" X 3.43" X 18.43" 346mm X 87mm X 468mm

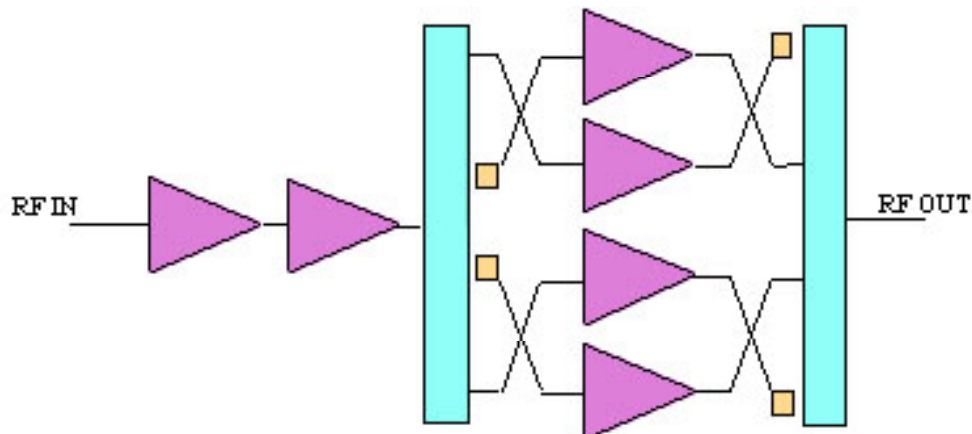

225W High Power TV Broadcasting Amplifier