

Coaxial 250W 35dB Directional Coupler 0.9GHz-9GHz



Product Description

RFDC9M9G35 is a coaxial directional coupler with a frequency range of 0.9 to 9GHz.

The power of this directional coupler is 250W. The Insertion Loss is 0.4dB with a typical directivity of 18dB.

The working temperature of this product is between - 40°C and + 85°C.

Features

- High power handling up to 250W
- Ultra Wide band operation
- High directivity within operational band
- Low Insertion Loss

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications, TA = +25°C


Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	0.9		8	8		9	GHz
Nominal Coupling	34.5	35	36.5	34.5	35	36	dB
Frequency Sensitivity		±0.7	±1		±0.5	±0.7	dB
Directivity	16	18		11	14		dB
Insertion Loss (Excl Coupling)		0.3	0.4		0.35	0.4	dB
Insertion Loss (true)		0.3	0.4		0.35	0.4	dB
Primary Return Loss	14	20		14	18		dB
Secondary Return Loss	14	20		14	18		dB
Power Rating	Average		250				W
	Peak		1 (10% Duty Cycle, 10us Pulse Width)				KW
Weight			0.45 Max.				lbs
Impedance			50				Ω
Input / Output Connectors	N-Female(Input) – N-Female(Output)-SMA-Female(Coupled)						
Package	Epoxy Sealed (Standard)						
	Hermetically Sealed (Optional)						

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Typical Performance Plots


Insertion Loss

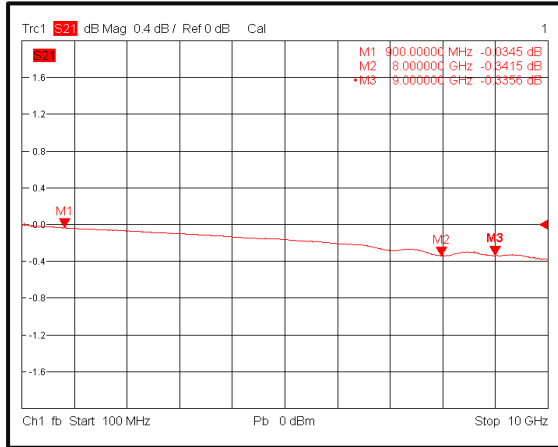


Primary Return Loss

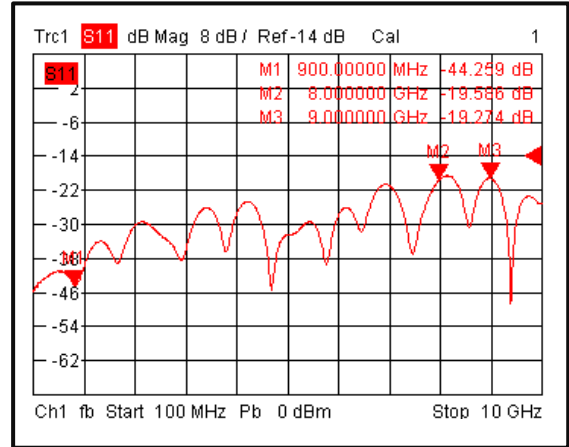


Secondary Return Loss

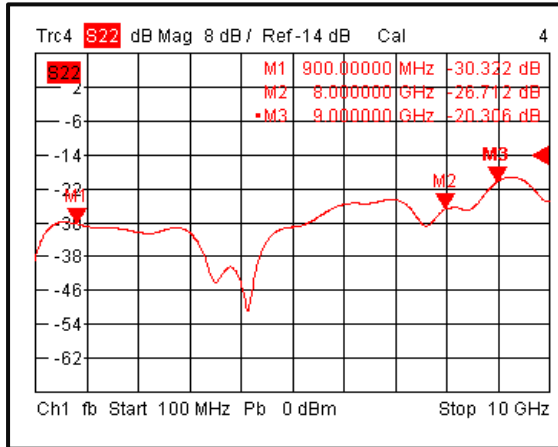


Directivity

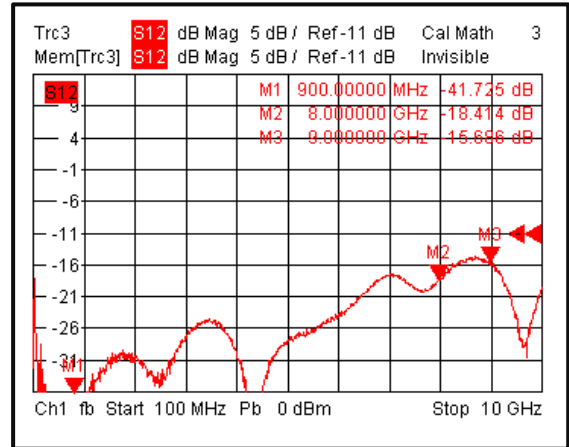

Nominal Coupling

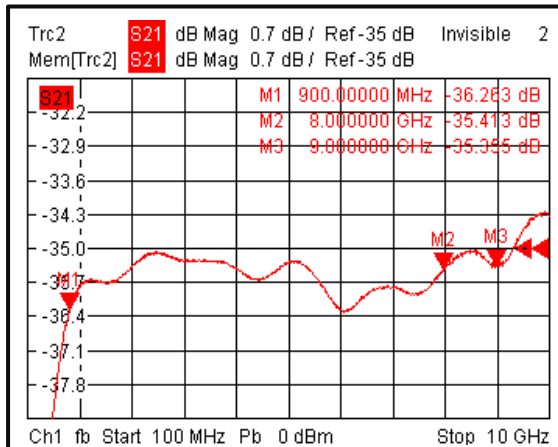

Outline Drawing

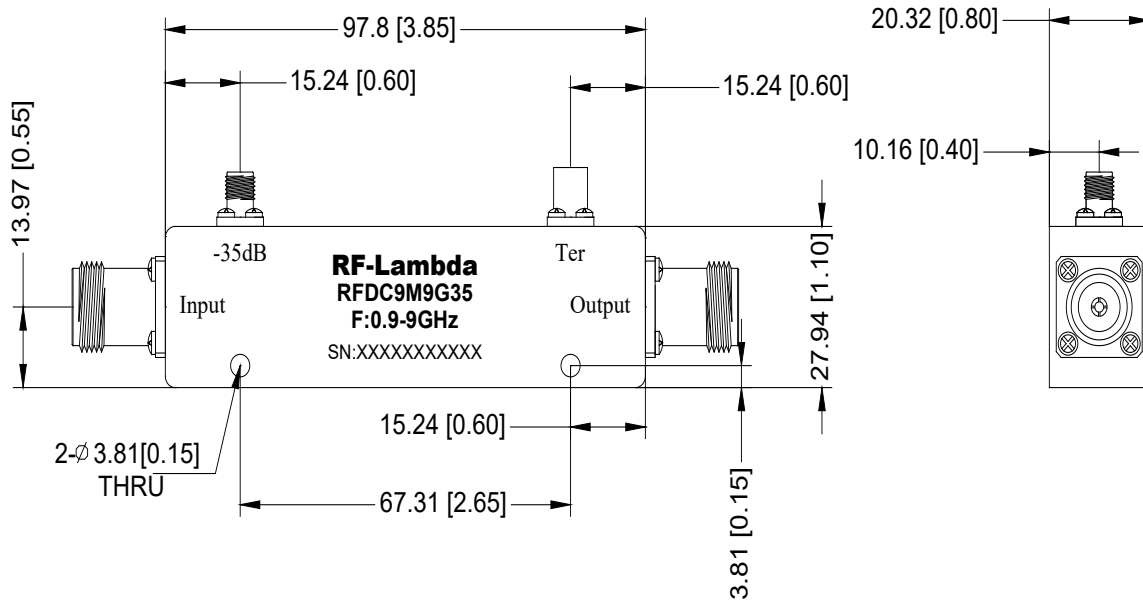

Notes:

1. Package Material: Aluminum
2. Plating: Blue
3. All dimensions are in millimeters [inches].
4. Outline Tolerances ± 0.25 [0.01], Mounting Hole Tolerances ± 0.2 [0.008] unless otherwise specified.



Additional Information

Documentation	Webpage
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFDC9M9G35	Standard	0.9-9GHz Directional Coupler

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.