


## Heatsink / Vacuum Heatpipe Air Cooling System

All Dimensions in mm [inches]  
Outline Tolerances  $\pm 1.5$  [0.06]  
Mounting Holes Tolerances  $\pm 0.2$  [0.008]

**MANDATORY DURING OPERATION**

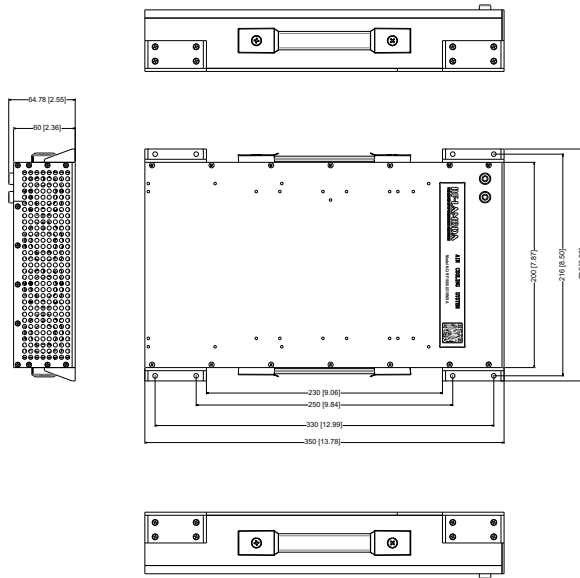

Wire Color	Connector Pin
Red	+24V
Black	GND

### Mechanical and Electrical Specifications

Parameter	Min.	Typ.	Max.	Units
Heat Dissipation Power( $\Delta T_{25^\circ\text{C}}$ )			365	W
Fan Supply Current (I <sub>dd</sub> ) @+24 V		0.66		A
Fan Supply Voltage	21.6	24	26.4	V
Working Temperature	-20		+70	°C
Power Supply Connectors	4mm Female Banana Plugs			
Weight	/			Ounces / Kg
Material	Aluminum			
Finish	Nickel Plated			

### Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.