



Absorptive 15-18GHz Coaxial SP3T Switch



Features

- Wide Band Operation 15-18GHz
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -45°C~+85°C
- Customization available upon request
- Hermetically sealed package up to 60,000ft available upon request.

Electrical Specifications, TA = +25° C, With Vdd = +5V & VCTL = 0/ +5V

Description ^{0.6}	PN: RFSP3TA1518GAR			
	SP3T Absorptive Switch			
	High Power Cold Switching			
Parameters	Min	Typ.	Max	Units
Frequency Range	15~18			GHz
Insertion Loss		3.0	3.5	dB
Insertion Loss Temperature Coefficient		0.003		dB/°C
Isolation	70	80		dB
Input VSWR		1.6	2	ratio
Output VSWR (ON State)		1.6	2	ratio
Output VSWR (OFF State)	10			ratio
RF Input power (CW)			10	W
Power Dissipation (CW)		5.5		W
IM3		45		dBc
1dB Compression P1dB		39		dBm
Switching Speed			200	ns
Weight	5			ounces
Impedance	50			Ω
Biasing(+5V)	120			mA
Input /Output Connector	SMA-Female/SMA-Female (Standard)			
Finishing	Gold Plating			
Material	Brass			
Seal	Hermetically Sealed (optional)			

Absorptive Coaxial Single Pole Three Throw Switch 15-18GHz



Absolute Maximum Ratings

Biassing	+5V±10%
TTL Control Voltage	0~0.8V/2~5V
Operating Temperature(°C)	-45 ~ +85
Storage Temperature(°C)	-50 ~ +125

Ordering Information


Part No	ECCN	Description
RFSP3TA1518GAR	EAR99	SP3T 15-18GHz PIN Diode Switch

Environment specifications


Operational Temperature (°C)	-45 ~ +85
Storage Temperature (°C)	-50 ~ +125
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35C, 95%RH at 40°C
Shock	20G for 11msc half sin wave, 3 axis both directions

Typical performance plots


Insertion Loss

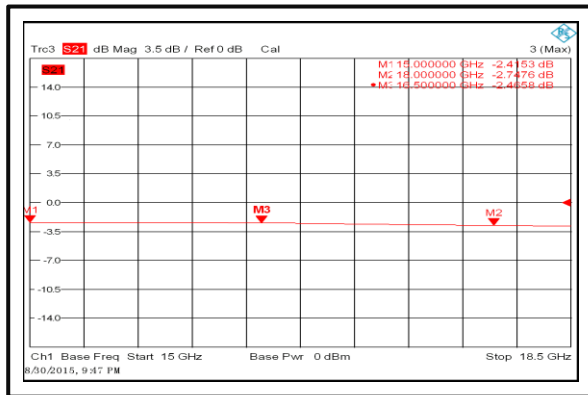


Input VSWR

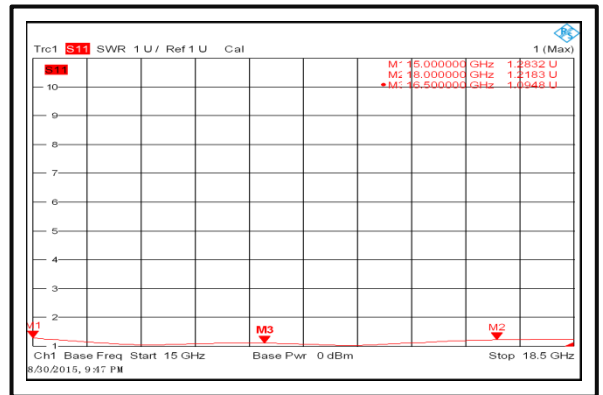

Output VSWR

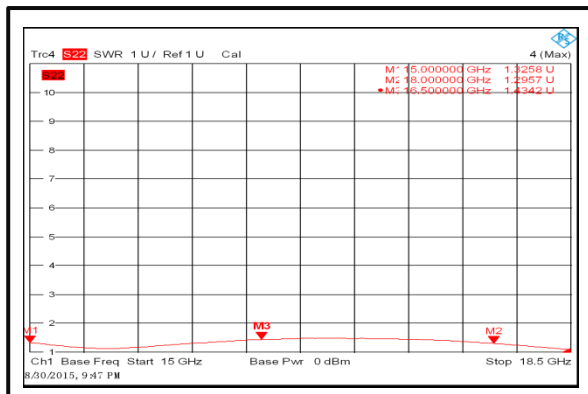

Isolation

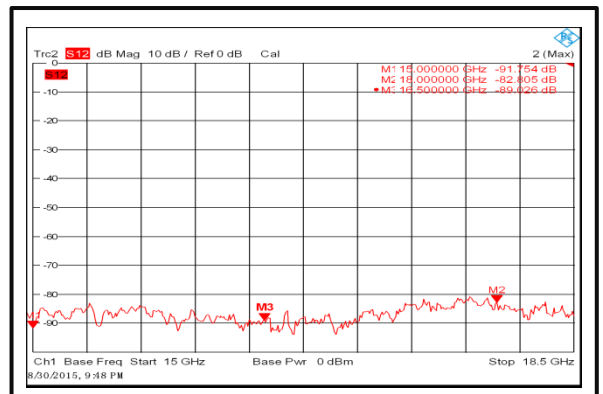




RF-LAMBDA

LEADER OF BROADBAND SOLUTIONS

RFSP3TA1518GAR

Switching Speed



Switching Speed



Output Third Order Intercept (IP₃)



Outline Drawing:

All Dimensions in mm (inches)

RF-Lambda
RFSP3TA1518GAR
F:15-18GHz
SN:XXXXXXXXXX

4-ø2.2[0.09] THRU

Control Pin Customization available upon request

Control Input TTL		Signal Path State
E2	E1	
0	0	Jo-J1
0	1	Jo-J2
1	0	Jo-J3

ATTENTION
STATIC SENSITIVE DEVICES
HANDLE ONLY AT
STATIC SAFE WORK STATIONS

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Absorptive Coaxial Single Pole Three Throw Switch 15-18GHz