

Reflective Coaxial SP8T Switch 52GHz-72GHz



Product Description

RFSP8TR52G72G is a reflective coaxial single pole eight throw switch with a frequency range of 52 to 72GHz.

The power input of this switch is 23 dBm Max. The insertion loss is 12 dB with a typical isolation of 35dB.

The product features of fast switching speed, low insertion loss and high isolation.

The working temperature of this product is between - 40°C and + 85°C

Features

- TTL compatible driver included
- Fast Switching Speed
- Low Power Cold Switching
- Insertion Loss 12dB
- Isolation 35dB
- 50 Ohm Matched

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications(TA = +25°C), Vdd = +5V/-5V, TTL = 0 / +5V

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		52 - 69			69-72		GHz
Insertion Loss		11.0	12.5		12.0	13.0	dB
Insertion Loss Temperature Coefficient		0.003			0.003		dB/ °C
Isolation	30	35		30	35		dB
Input VSWR		2.8	3.0		2.5	3.0	: 1
Output VSWR		2.8	3.0		2.5	3.0	: 1
RF Input power (CW)			23			23	dBm
DC Power Dissipation		1.5			1.5		W
0.1dB Compression Point (P0.1dB)		23			23		dBm
IIP3		35			35		dBm
Switching Speed			100 Typ.				ns
Bias Current (+5V / -5V)			300/40 Max.				mA
Weight			0.16 Max.				lbs
Impedance			50				Ω
Input / Output Connectors			1.85mm-Female(Input) – 1.85mm-Female(Output)				
Interface and Control Connector			MICRO-D9 (Female)				
Package			Epoxy Sealed (Standard)				
			Hermetically Sealed (Optional)				

Absolute Maximum Ratings

Parameter	Rating
Biasing	+5V±10%/-5V±10%

*TTL pins cannot be connected to the negative voltage otherwise the internal driver will be damaged.


Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
*Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


*For vibration testing details please see additional information section.

Typical Performance Plots


Insertion Loss @+25°C

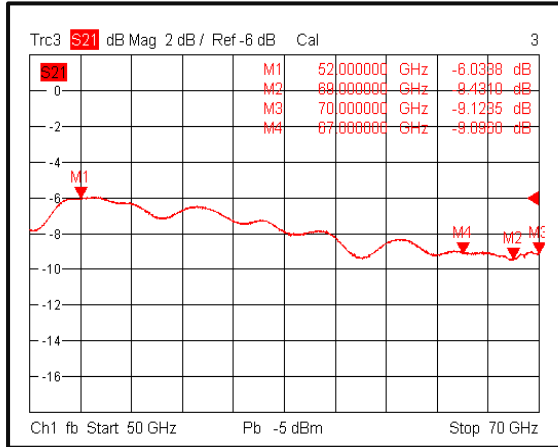


Input VSWR @+25°C

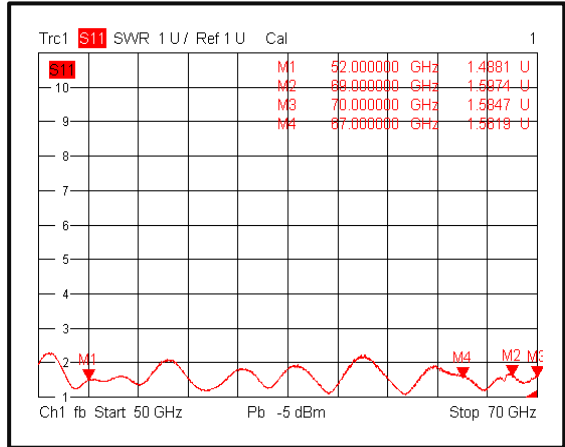


Output VSWR @+25°C

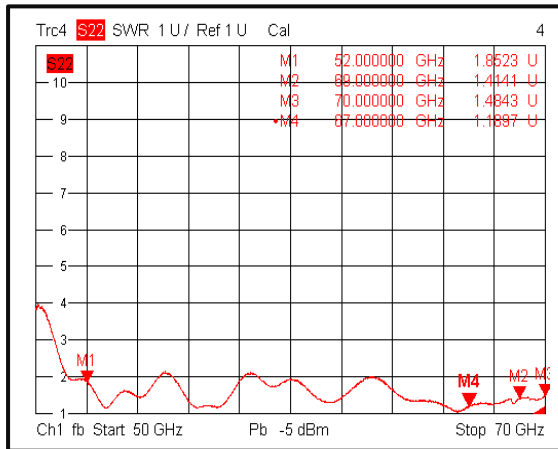


Isolation @+25°C

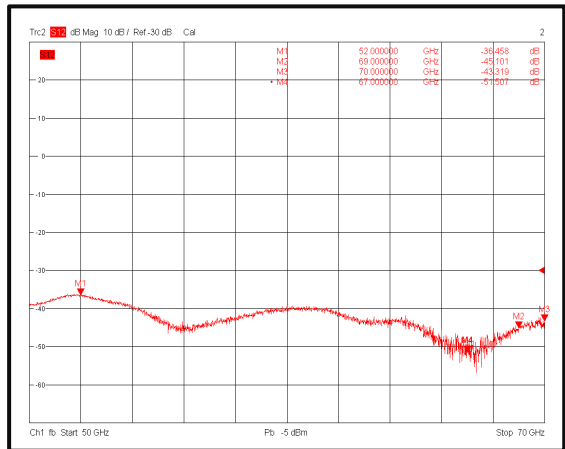

Insertion Loss @-40°C

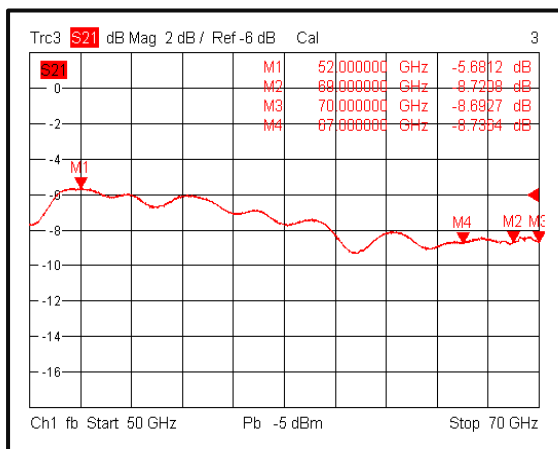


Input VSWR @-40°C

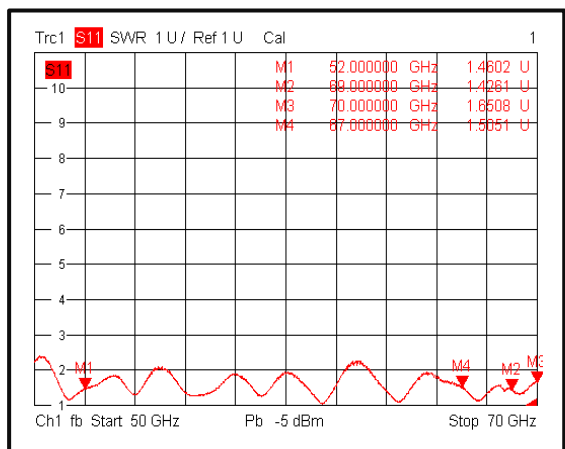


Typical Performance Plots


Output VSWR @-40°C

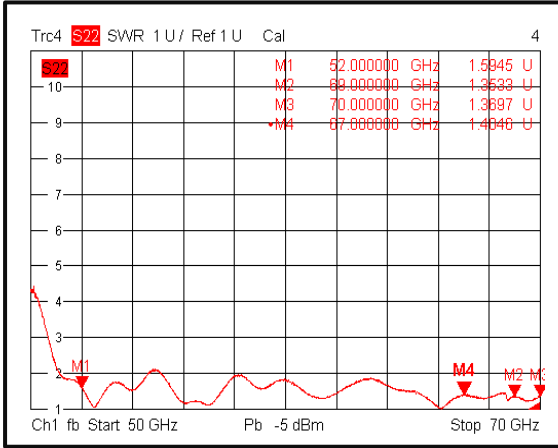


Isolation @-40°C

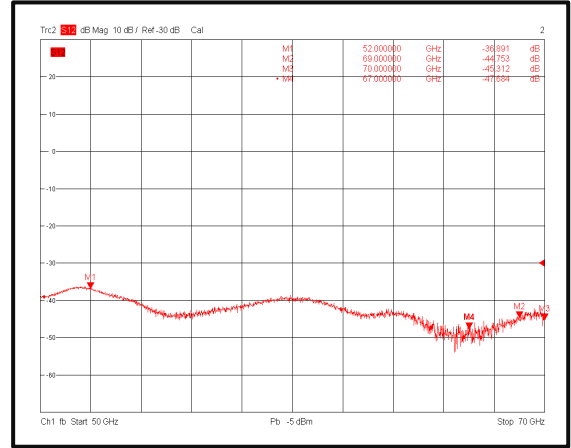


Insertion Loss @+85°C

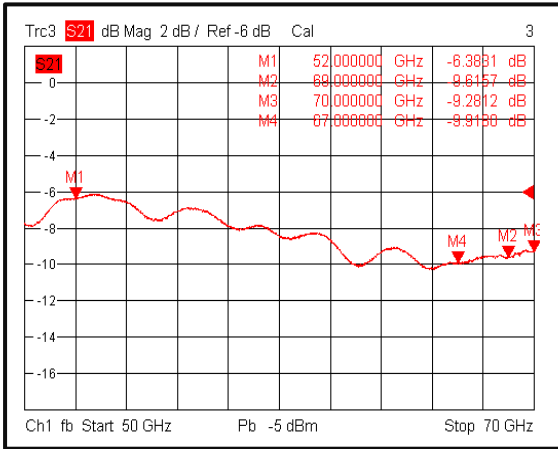


Input VSWR @+85°C

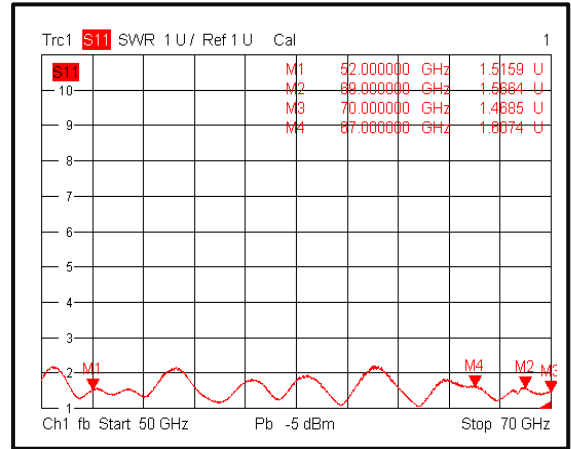

Output VSWR @+85°C

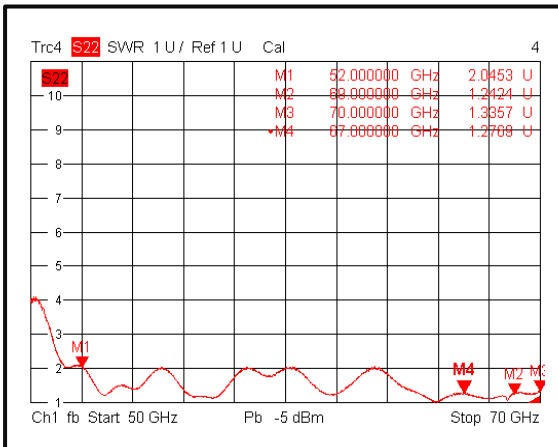


Isolation @+85°C

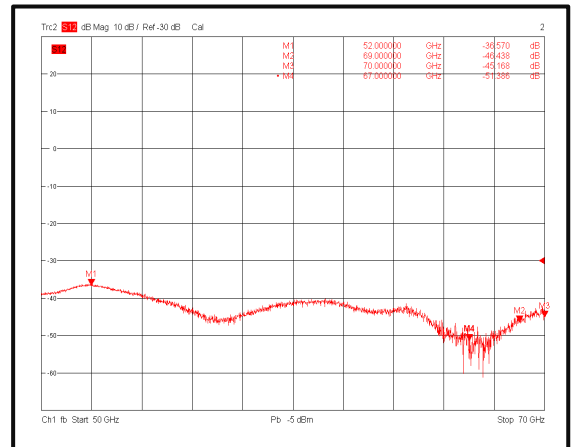


Typical Performance Plots

Insertion Loss Temperature Coefficient

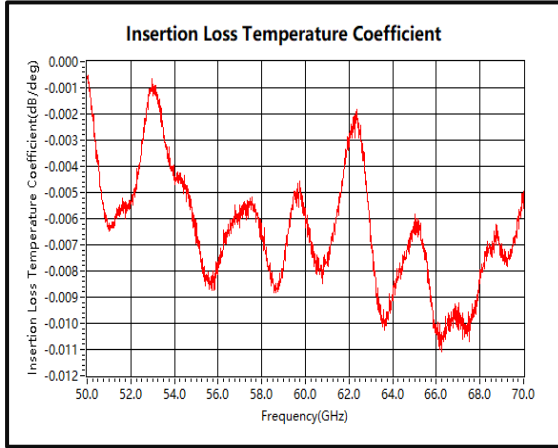


Insertion Loss vs. Temperature

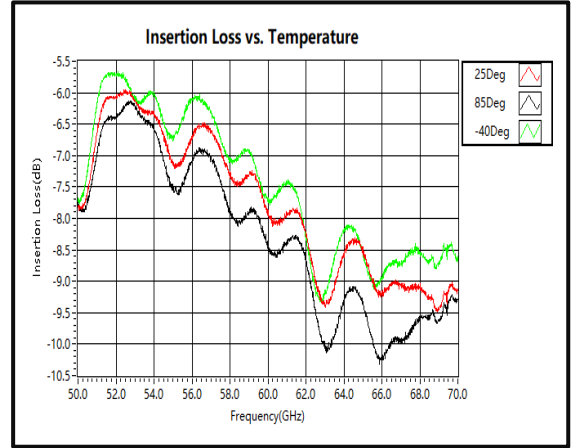


IIP3





Switching Speed

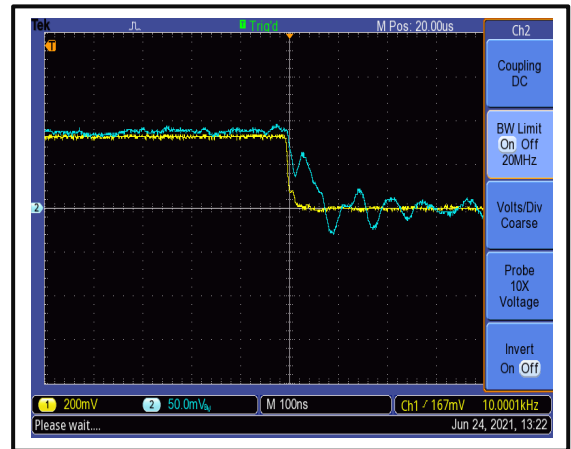

Switching Speed

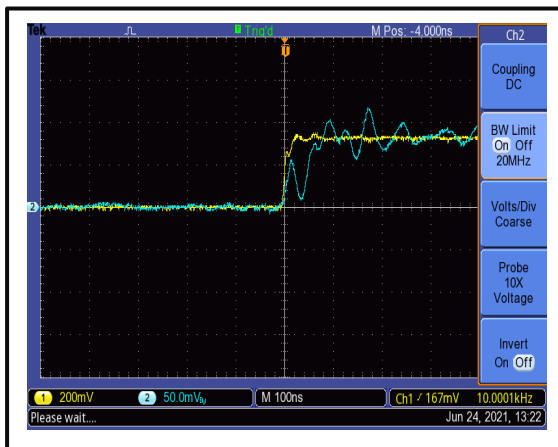

Outline Drawing

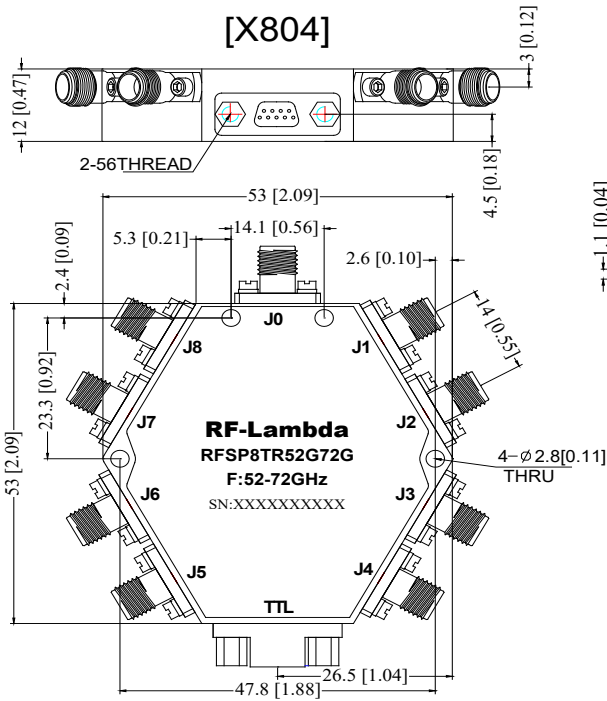

MICRO-D9(Female)


Truth Table

TTL Control Voltage THRESHOLD					Low(0)=0~0.8V High(1)=2.8~5V
Control Input TTL					Signal Path State
C5	C4	C3	C2	C1	
0	0	0	0	0	J0-J1
0	0	0	0	1	J0-J2
0	1	0	1	0	J0-J3
0	1	0	1	1	J0-J4
1	0	1	0	0	J0-J5
1	0	1	0	1	J0-J6
1	1	1	1	0	J0-J7
1	1	1	1	1	J0-J8

Control Pin Customization Available Upon Request

Notes:

1. Package Material: Aluminum
2. Plating: Gold
3. All dimensions are in millimeters [inches].
4. Housing Tolerances ± 0.1 [0.004] unless otherwise specified.
5. Standard torque wrench must be used to secure RF connectors.



Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP8TR52G72G	Input connector 1.85mm-Female and Output connector 1.85mm-Female	52-72GHz SP8T PIN Diode Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.